
Plain Paper Laser Fax UF-6100

dependable

81/1/16



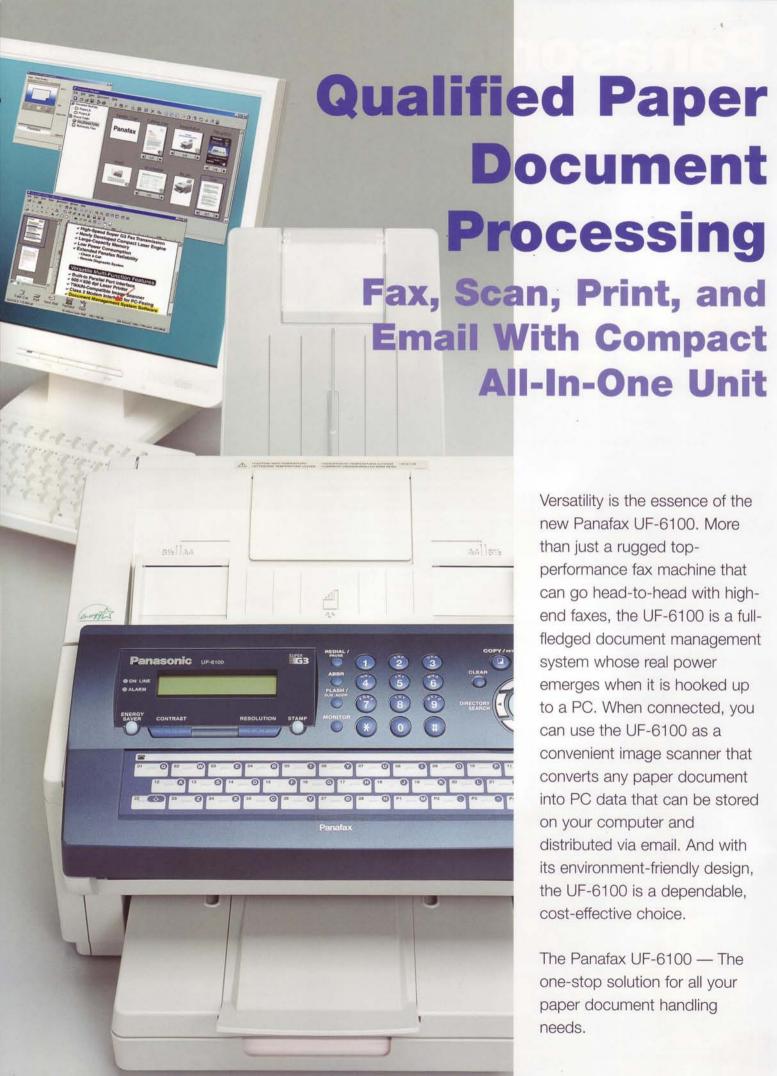

Business-Optimized Fax Capability

High-speed Scanning

Built for true business-level faxing, the UF-6100 scans documents quickly at a rate of 3 seconds per page. In combination with the 30-sheet automatic document feeder, this makes it possible for you to fax a multi-page document at the touch of a button without having to wait around.

480 Pages Large Document Memory

With its high-capacity 8 MB document memory, the UF-6100 can store up to 480 pages*1. This allows it to easily handle several high-volume jobs at once, so you'll never have to wait around.

*1 Based on ITU-T Image No.1 scanned in Standard mode.

Super-Fast Fax Transmission

With Quick Memory Transmission, the UF-6100 dials as soon as the first page has

Reliability

Low Power



been scanned even when sending a large, multi-page document.

Energy Saving &

Multi-Function Capability

Print It from a PC — 600 dpi Laser Printer

With the UF-6100, convenient PC-linked features are available right away via a built-in parallel interface and the provided PC software. Just install the printer driver on

your computer and you can use the UF-6100 as a high-quality 600 x 600 dpi laser printer*2.



Scan It to PC — TWAIN Image Scanner

The UF-6100 can also function as a TWAIN-compatible 400 dpi image scanner, allowing you to easily convert paper documents into PC data. Using the provided Document Manager software*2, scanned documents can be efficiently managed, edited and even shared by network PCs.

UF-6100's power consumption has been reduced to a mere 2.4 Wh in the sleep mode.

Consumption

With Check & Call, the UF-6100
automatically reports low toner
status and certain mechanical
problems to a service centre,
while the Remote Diagnostic System*3
enables our expert technicians to quickly
locate any problems via a telephone line and
provide you with a solution.

Thanks to our Energy Saver technology, the


Extended Reliability

*3 Not available in certain destinations

Even Email It — Document Manager & PC-Fax

The Document Manager software makes it easy to send documents via email — just attach them directly to email messages with simple "drag & drop" operation. And, with the provided Panafax Desktop software*2, you can send a fax directly from your PC via the UF-6100 without having to print it out.

*2 Compatible with Windows® Server2003, Windows XP, Windows 2000, Windows 98, Windows Me and Windows NT® 4.0 operating system.

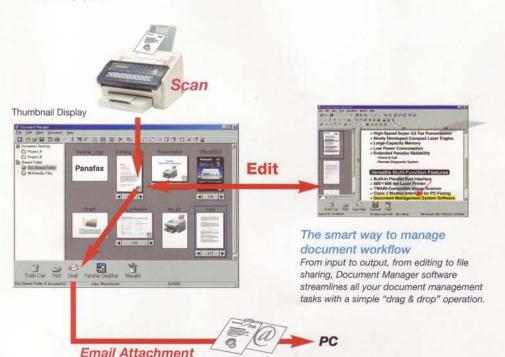

And More...

- Multi-Tasking Capability
 You can transmit a fax from memory and print out a PC document at the same time.
- 132-Station Autodialer
 The provided software allows you to easily edit telephone numbers and ID names for autodialing.
- 64-Level Halftone
- Panasonic Super Smoothing
- 250-Sheet Paper Capacity Expandable to 500 Sheets
- Verification Stamp

Features

- Autodialler One-Touch: up to 32 stations
 Abbreviated: up to 100 stations
 Digit of Telephone Number: up to 36 digits
- Program Keys (up to 4 programs)
- Multi-Tasking Operation
- Directory Search Dialling
- Directory Sheet Print
- Intelligent Redial
- · Chain Dialling
- Distinctive Ring Detector (DRD)*1
- Quick Memory Transmission
- · Multi-Station Transmission (up to 144 stations)
- Automatic Memory Retransmission
- Deferred Transmission
- Deferred Multi-Station Transmission
- · Priority Direct Transmission
- Edit File Mode with View Mode
- · Automatic Cover Sheet
- · Receive to Memory
- Substitute Reception
- Selective Reception
- Number of Memory Job Files (Max. 10 files)
- Fax Forward
- Polling/Multi-Station Polling (up to 144 stations)
- Deferred Polling/Deferred Multi-Station Polling
- Memory Polling Transmission (1 file)
- Confidential Mail Box*2 (10 mail boxes)
- Password Transmission/Reception*2
- ITU-T Sub-Address Transmission
- · Panasonic Super Smoothing (Fax/Copy)
- 64-Level Halftone
- · Automatic/Fixed Reduction
- Overlapping Print
- Collation Stack
- Verification Stamp
- · Communication Journal with Image Data
- · Header/Total Page Print
- · Transaction Journal with View Mode
- Fax Access Code (Fax Lock)
- PIN Code Access*1
- Fax/Tel Auto Switch*1
- External TAM Interface
- Remote Reception*1
- Multi-Purpose LCD Display (20 x 2 lines)
- · Multiple Copy with Sorting (up to 99 copies)
- Reduction Copy
- Energy Saver
- Remote Diagnostic*1
- Check & Call Function
- Printer Interface
- Scanner Interface
- PC-Fax Software ("Panafax Desktop")
- Document Manager
- Document Viewer with Annotation Function
- Phone Book Editor
- Configuration Editor
- Status Monitor

Option

- 250-sheet Universal Paper Feed Unit (UE-409070)
- Handset Kit (UE-403176)*1

Consumable

 All-In-One Print Cartridge (toner/developer/drum) (UG-3350) 7,500-page Toner*¹⁰


UF-6100 Specifications

Compatibility	ITU-T Group 3, ECM
Modern Speed	33,600 - 2,400 bps with automatic fallback
Coding Scheme	MH / MR / MMR
Transmission Speed*3	Approx. 3 sec.
Document Size	Max.: 257 mm x 2000 mm (with operator's assistance)
	Min.: 148 mm x 128 mm
Effective Scanning Width	208 mm (A4)
Automatic Document Feeder Capacity	30 sheets (60 g/m²)
Scanning Resolution (Fax)	Standard: 8 dots/mm x 3.85 lines/mm
	Fine: 8 dots/mm x 7,7 lines/mm
	Super Fine: 8 dots/mm x 15.4 lines/mm
	16 dots/mm x 15.4 lines/mm*4
Scanning Speed*5	Approx. 3 sec. (A4, Standard mode)
Recording Method .	Laser printing on plain paper
Printing Speed*6,*7	6 ppm
Recording Paper Size	A4 / Letter / Legal
Effective Recording Width	202 mm (A4)
Recording Paper Capacity	250 sheets (75 g/m²) Max. 500 sheets with optional Paper Feed Unit
Recording Resolution	Fax / Copy: 406 dpi x 391 dpi
	Printer: 600 dpi x 600 dpi
Image Memory Capacity*8	8 MB (Approx. 480 pages)
Printer / Scanner Interface	Bi-directional Parallel (IEEE1284)
Scanner Driver	TWAIN
Scanning Resolution (PC)*4	400 dots/inch x 400 dots/inch
Power Requirements	AC 220 - 240 V, 50/60 Hz
Power Consumption	Max.: Approx. 490 W
	Sleep Mode: 2.4 Wh
Dimensions (W x D x H)*9	370 mm x 474 mm x 250 mm
Weight*9	9.0 kg (Excluding consumable supplies and optional equipment)

- *1 May not be available in certain destinations.
- ² Panafax proprietary features work only with selected Panafax machines.
- *3 Transmission time applies to memory transmission of text data using only ITU-T Image No. 1 between the same models at maximum modem speed. Transmission time may vary in actual usage. Usually public telephone lines can only support communications speeds of 28.8 Kbps or lower. Via PBX, transmission speed may fall back to a lower speed.
- *4 Interpolated resolution (Optical Resolution: 8 dots/mm x 15.4 lines/mm)
- *5 Scanning speed applies to the feeding process from the top to the end of a single page test chart. The time for the feeding process does not include the time that it takes for the top edge of the page to reach the scanning point and page ejection. Time for entire storing process is not applied.
- *6 Speeds are contingent upon applications, machine configuration, and status. Individual speeds may vary.
- *7 In multiple copy mode excluding the first copy.
- *8 Based on ITU-T Image No. 1 scanned in Standard mode.
- *9 Dimensions and weight are approximate.
- *10 Based on ITU-T Image No.1 scanned in multiple copy mode. Yield may vary according to operating conditions and environment where the machine is installed.

Microsoft®, Windows® and Windows NT® are registered trademarks of Microsoft Corporation. All other brand or product names are the property of their respective holders.

Design and specifications are subject to change without notice.





As an ENERGY STAR® Partner, Panasonic has determined that this product meets the ENERGY STAR® guidelines for energy efficiency.

ISO 9001 Quality Management System

Our business processes which produce document, information and network products, from manufacturing to marketing, conform to ISO 9001 Quality Management Systems standard. Design, development, manufacture, installation, repair and maintenance of document, information and network products, their associated devices and consumables. In addition, the plants outside Japan have acquired ISO 9001 certification.







